


YC 永磁器
 PERMANENT
 MAGNETIC LIFTER

Features:

- Widely used in machining and mould processing industry.
- Using high-performance permanent magnetic materials, with strong magnetic force, unique circuit design, remanence almost zero.
- High safety factor, maximal magnetic force is 3.5 times of rated lifting capacity.
- Handle switches with safety button, easy for single-hand operation, more safety and convenience.
- Without electricity, magnetic force permanent, more safety in using, and can be operated in the field.

CÔNG TY TNHH TM CN HÙNG MẠI
 719 XVNT, P.26, BÌNH THẠNH, TP.HCM

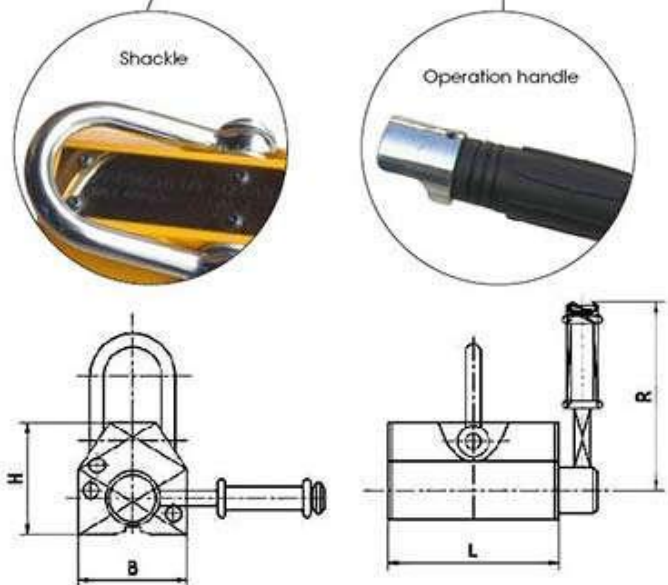

Model	YC-100	YC-300	YC-500	YC-600	YC-1000	YC-2000	YC-3000	YC-5000
Rated lifting strength (KGF)	100	300	500	600	1000	2000	3000	5000
Cylindrical lifting strength (KGF)	50	150	250	300	500	1000	/	/
Max. pull-off strength (KGF)	350	1050	1750	2100	3500	7000	10500	17500
L	92	163	216	234	264	370	452	720
B	62	92	120	122	172	232	274	296
H	67	93	116	118	168	221	266	266
R	140	180	220	220	260	450	520	700
Operation temperature (°C)	<-80	<-80	<-80	<-80	<-80	<-80	<-80	<-80
Dead weight (kg)	3	10	21	24	50	125	220	398